




The ME Access Door

The ME door provides an economical, superior quality and aesthetically pleasing solution for new construction or remodeling. The frame, return and extended door stop are one piece construction of 16 gauge steel, which provides unmatched strength and rigidity. The low profile, one piece concealed hinge ensures a smooth opening door and easy access to plumbing, heating and air conditioning components in the wall or ceiling. Available in many sizes, the ME door will meet most specifications and is suitable for all applications whether it is installed in drywall, plaster, or masonry.

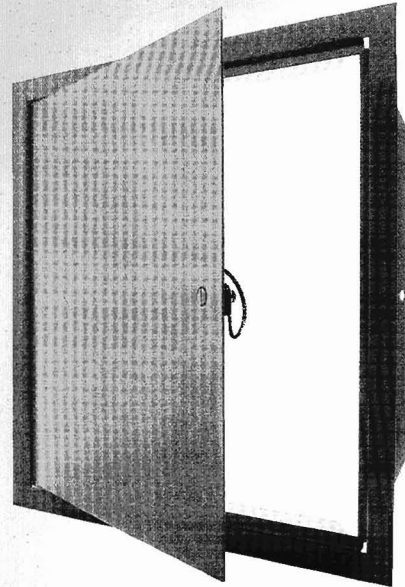

Specifications

Access doors shall be type ME

- Return, doorstop and 3/4" trim shall be one-piece construction of 16 gauge steel.
- Door shall be 16 gauge steel.
- Hinge shall be concealed continuous piano hinge.
- Locks shall be flush, screwdriver operated with stainless steel cam and stud or cylinder lock with dust shutter.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel.
- 24" door is fabricated with corners to reinforce the frame.

Standard Sizes

Door Size (H x W)	Wall/Ceiling Opening	# of Stud Latches	Shipping Wt. (lbs.)
6 x 6	6 1/4 x 6 1/4	1	1.2
8 x 8*	8 1/4 x 8 1/4	1	2.2
10 x 10*	10 1/4 x 10 1/4	1	3.4
12 x 12*	12 1/4 x 12 1/4	1	4.9
14 x 14	14 1/4 x 14 1/4	2	6.6
16 x 16*	16 1/4 x 16 1/4	2	8.7
18 x 18*	18 1/4 x 18 1/4	2	11.0
20 x 20	20 1/4 x 20 1/4	2	15.6
24 x 24*	24 1/4 x 24 1/4	4	19.6

*These sizes are available in stainless steel.

Special sizes and modifications available on request.

